## E700 SERIES HORIZONTAL SLIDER

The Quaker E700 Series Horizontal Slider window is specially glazed and specifically designed to meet ASTM 1886: ASTME 1996 for large missle Impact resistance..

#### **FEATURES**

#### **♦ Commercial Framing System**

- 3 ¼" main frame
- 0.062" wall thickness of frame

#### **♦** Thermally Enhanced Design

- Azon pour and debridge thermal break is ½" wide in all main frame and vent rail extrusions
- Frame and sash mitered and joined with screw fasteners
- Fin seal wool pile weatherstripping
- Positive interlocks

#### **♦** Glazing

• 1" insulated glass

#### **♦** Hardware

- Brass rollers with stainless steel axle pins for easy operation
- Gravity latch

#### **♦** Screen

Extruded aluminum screen frame with BetterVue™ mesh

#### **BENEFITS**

- ♦ The capacity to match exterior colors for unique project facades
- The ability to facilitate large sizes for taller and wider window openings

#### PERFORMANCE

♦ Structural & Thermal (test reports or thermal simulations available upon request)

| Model                                  | Horizontal Slider |
|--|-------------------|
| AAMA/WDMA/CSA 101/I.S.2/A440-08 Rating |                   |
| Structural Load P.S.F.                 |                   |
| Air at 50 MPH (cfm/ft²)                |                   |
| Water (No Penetration) P.S.F.          |                   |
| U-Value (with Low-E and Argon)         |                   |
| SHGC (with Low-E and Argon)            |                   |

Window test size: 72" × 66"

Operating Force: 22 lbf (maintain motion), 1 lbf (latches)

#### Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association, the National Fenestration Rating Council and the Window & Door Manufacturers Association.







#### **OPTIONS**

#### **♦** Available Configurations

- Fixed-Active
- Active-Fixed
- Active-Fixed-Active
- Fixed-Active-Fixed

#### **♦ Muntin Choices**

• Internal or simulated divided lites available

#### **♦** Hardware

- Sweep lock
- Night latch
- Limited travel latch
- Wide variety of locking and operating hardware options

#### **♦ Nailing Fin**

#### ♦ Screen

- Extruded aluminum screen frame with aluminum wire mesh
- Extruded aluminum screen frame with sunscreen mesh
- Extruded aluminum screen frame with stainless steel 0.009" thickness mesh
- Security screen (limitations apply)

#### **♦** Glazing

- Capillary tubes
- Argon gas
- Wide variety of glazing, tinting and thickness options

#### **◊** Panning & Trim Choices

• Wide variety of panning, receptor and trim available

#### ♦ Mulling

• Wide variety of structural mulls

#### **♦** Specialty

Attached exterior or interior storm window

• Extension jambs



#### ARCHITECTURAL PAINT COATINGS AND FINISHES

♦ Baked on powder coat finish meets ANSA/AAMA 2604 specs and is available in unlimited colors

• 11 Popular Colors



- Unlimited Custom Colors
- \* Printed colors shown here may not accurately depict actual painted colors. Color samples are available upon request.
- ♦ ANSA/AAMA 2605 powder coat finishes
- ♦ AAMA 611-98 Class I clear and tinted anodized finishes








**Horizontal Slider** 








### )IMPACT 3 1/4" Frame Depth


# **E700 SL WITH NAILING FIN**

This document contains confidential and proprietary information intended for the private use of Quaker. © 2016 Quaker Window Products Co., INC. All rights reserved.

Quaker reserves the right to change any/all designs without notice. Due to periodic re-certification requirements, result shown may vary.

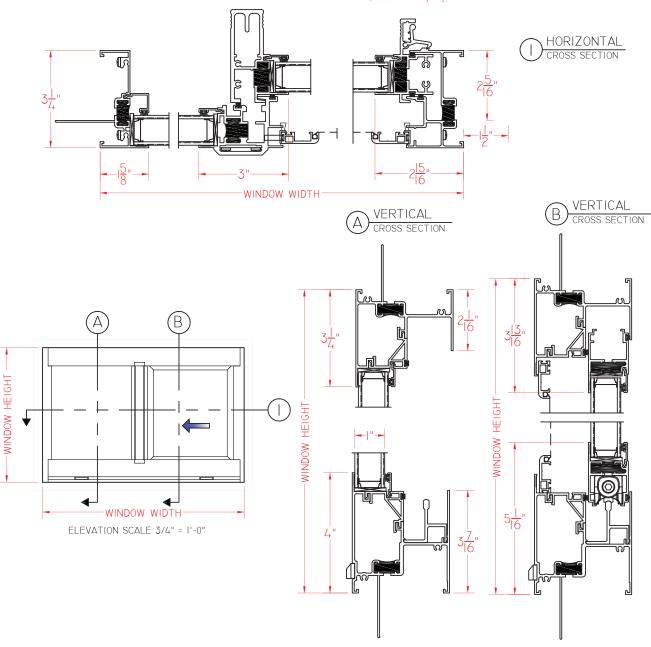

SCALE 1:3















## E700 Series

### IMPACT


### 3 <sup>1</sup>/<sub>4</sub>" Frame Depth Horizontal Slider


**VERTICAL** 


# **E700 SL WITHOUT NAILING FIN**

This document contains confidential and proprietary information intended for the private use of Quaker. © 2016 Quaker Window Products Co., INC. All rights reserved.

Quaker reserves the right to change any/all designs without notice. Due to periodic re-certification requirements, result shown may vary.

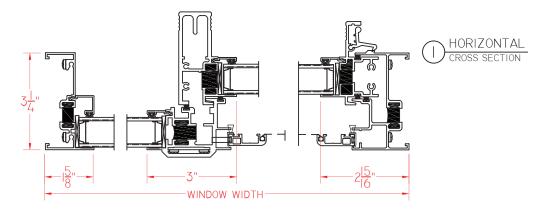



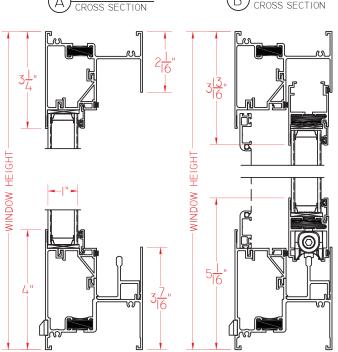

**VERTICAL** 

SCALE 1:3

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association, the National Fenestration Rating Council and the Window & Door Manufacturers Association.







